# Compact Fix




## IP65 5W/830 36D DIM ACC WH

Downlight

Compact Fix is a high-quality downlight for general lighting in residential buildings and public spaces. Typical applications include hotels, restaurants, lobbies and wet spaces. Compact Fix Dim -versions can be installed directly on the insulation material. The luminaire can be installed on a 22-mm rail. All models are dimmable.

Compact Fix Downlight 5W 3000K 400lm Beam angle 36°; Dim phase cut-off; Dim phase cut-on; IP65; IK02; Protection cl. II; L70B50 90000h; LED not exchangeable; CRI>80; SDCM3; Suitable for through wiring; 3x1.5mm²; Housing al; Colour wh; Cover Plastic, transparent; C16 max. 200

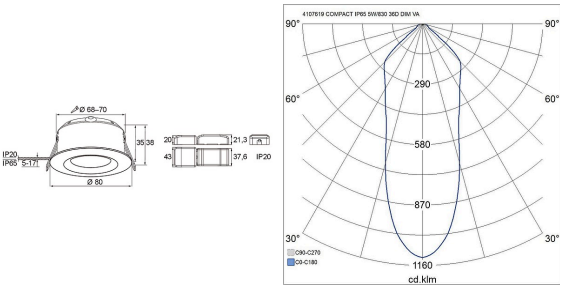


Stocked: Yes

**IP65 5W/830 36D DIM ACC WH**

| PRODUCT CODE | CODE | KG | PRODUCT FAMILY |
|---|---|---|---|
| 4107619 | 4107619 | 0.15 | Compact Fix |





# IP65 5W/830 36D DIM ACC WH

EC001744 Downlight / spot luminaire / floodlight

| Mounting | |
|---|---|
| Suitable for surface mounting | No |
| Suitable for recessed mounting | Yes |
| Suitable for wall mounting | No |
| Suitable for suspended mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for traverse mounting | No |
| Suitable for pedestal/floor mounting | No |
| Suitable for light-track mounting | No |
| Suitable for clamp-mounting | No |
| Suitable for low voltage cable system | No |
| Degree of protection (IP) | IP65 |
| Degree of protection (IP), rear side | IP20 |
| Degree of protection (IP), front side | IP65 |
| Impact strength | IK02 |
| Emergency function monitoring system | None |
| Type of wiring | Suitable for through wiring |
| Number of poles | 3 |
| Conductor cross section (mm²) | 1.5 mm² |
| Connectable conductor cross section (min) (mm²) | 0.75 mm² |
| Connectable conductor cross section (max) (mm²) | 1.5 mm² |
| Connection type | Screwless terminal |
| Luminaire with limited surface temperature, class "D“ in acc. with EN 60598-2-24 | Yes |
| Max. number of luminaires per miniature circuit breaker B16 | 100 |
| Max. number of luminaires per miniature circuit breaker C16 | 200 |
| Fit for workplace acc. EN 12464-1 | No |
| Luminaire may be covered with thermally insulating material | Yes |

| Structure | |
|---|---|
| Adjustability | Not adjustable |
| Lamp type | LED not exchangeable |
| Light source included | Yes |
| Suitable for number of lamps | 1 |
| Lamp holder | Other |
| Housing material | Aluminium |
| Surface protection | Powder coating |
| Housing colour | White |
| Cover material | Plastic, transparent |
| Surface brushed | No |
| Control gear included | Yes |
| Exchangeable control gear | Yes |
| Reflector | High-gloss |
| Reflector colour | Silver |
| Energy efficiency class of light source according to EU regulation 2019/2015 | F |
| Containing product according to 2019/2020/EU | Yes |
| Emergency power supply system | None |
| Emergency power supply integrated | No |
| Filament test according to IEC 60695-2-11 | 650 °C - 30 s |

| Dimming and control | |
|---|---|
| With movement sensor | No |
| With presence indicator | No |
| With light sensor | No |
| Dimmable | Yes |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI-2 | No |
| Dimming DALI | No |
| Dimming DMX | No |
| Dimming DSI | No |
| Dimming potentiometer (integrated) | No |
| Dimming LineSwitch | No |
| Dimming manufacturer's proprietary system | No |
| Dimming mains voltage modulation | No |
| Dimming trailing edge | Yes |
| Dimming leading edge | Yes |
| Dimming programmable | No |
| Dimming RF | No |
| Dimming Sine Wave Reduction | No |
| Dimming Touch and Dim | No |
| Dimming Zigbee | No |
| Dimming with push-button | No |
| No dimming function | No |
| Constant luminous flux control | No |
| IFTTT support available | No |
| Compatible with Apple HomeKit | No |
| Bluetooth operated | No |
| Compatible with Google Assistant | No |
| Compatible with Casambi | No |
| Compatible with Amazon Alexa | No |

| Electrotechnical data | |
|---|---|
| Voltage type | AC |
| Nominal voltage (min) (V) | 220 V |
| Nominal voltage (max) (V) | 240 V |
| Nominal current (min) (mA) | 332 mA |
| Nominal current (max) (mA) | 367 mA |
| Type of control gear | LED operating device current-controlled |
| Total harmonic distortion (THD) (%) | 20 % |
| Total harmonic distortion | 20 THD |
| Protection class according to IEC 61140 | II |
| Suitable for lamp power (min) (W) | 5 W |
| Suitable for lamp power (max) (W) | 5 W |
| Maximum system power (W) | 5 W |
| Luminaire efficacy (min) (lm/W) | 80 lm/W |
| Luminaire efficacy (max) (lm/W) | 80 lm/W |
| Power factor | 0.9 |
| Luminaire efficacy (lm/W) | 80 lm/W |

| Photometric data | |
|---|---|
| Light distributor | Reflector |
| Light sharing | Symmetric |
| Beam angle | Medium beam 20-40° |
| Light outlet | Direct |
| Colour of light (alphanumeric) | White |
| Colour temperature (min) (K) | 3000 K |
| Colour temperature (max) (K) | 3000 K |
| Colour temperature switchable | No |
| Colour rendering index (CRI/Ra) | 80-89 |
| Luminous flux (min) (lm) | 400 lm |
| Luminous flux (max) (lm) | 400 lm |
| Effective luminous flux (lm) | 400 lm |
| Rated luminous flux according to IEC 62722-2- 1 (min) (lm) | 400 lm |
| Rated luminous flux according to IEC 62722-2- 1 (max) (lm) | 400 lm |
| Lumen setting adjustable | No |
| Flickering value Pst LM | 1 |
| Beam angle adjustable | No |
| Stroboscope effect value SVM | 0.4 |
| Photobiological safety according to EN 62471 | RG0 |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Unified Glare Rating (UGR) | 22 |

| Lifetime and capacity | |
|---|---|
| Rated life time L70/B50 at 25 °C (h) | 90000 h |
| Rated life time L80/B50 at 25 °C | 60000 h |
| Lumen maintenance at median useful life of 35,000 hrs at 25 °C ambient (tq) (%) | 95 % |
| Lumen maintenance at median useful life of 50,000 hrs at 25 °C ambient (tq) (%) | 90 % |
| Failure rate at median useful life of 35,000 hrs at 25 °C ambient (tq) (%) | 5 % |
| Failure rate at median useful life of 50,000 hrs at 25 °C ambient (tq) (%) | 5 % |
| Rated ambient temperature acc. IEC62722-2-1 (min) (°C) | 0 °C |
| Rated ambient temperature acc. IEC62722-2-1 (max) (°C) | 25 °C |

| Measurements | |
|---|---|
| Length (mm) | 80 mm |
| Width (mm) | 80 mm |
| Height/depth (mm) | 38 mm |
| Outer diameter (mm) | 80 mm |
| Built-in length (mm) | 70 mm |
| Built-in width (mm) | 70 mm |
| Built-in width (min) (mm) | 68 mm |
| Built-in width (max) (mm) | 70 mm |
| Built-in height/depth (mm) | 36 mm |
| Installation height (min) (mm) | 2000 mm |
| Installation height (max) (mm) | 6000 mm |
| Recess diameter (min) (mm) | 70 mm |
| Recess diameter (max) (mm) | 70 mm |